

Color: Chestnut Brown

Aged Cedar

Weathered Cedar

Top / Bottom Rail:

(2) 2" x 6 1/2" x 92" Slotted Rail

Steel Insert:

(1) 1-1/2" x 1-1/2" x 92"

Pickets:

(11) 1" x 8" x 57 3/4" Tongue & Groove

U-Channel:

(2) 1" U-Channel x 55 1/8"

Hardware:

(6) #10 x 3/4" SS Pan Head Screw

Posts:

(1) 5" x 5" x 96"

(1) 5" x 5" External Cap

Posts are for visual representation only

Posts not included with panel

## ELEVATION VIEW

SIGNATURE REQUIRED

DATE

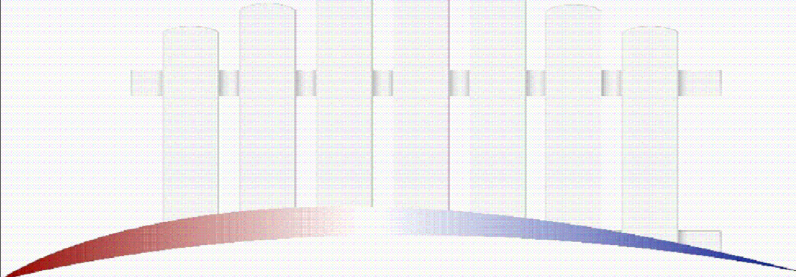
### NOTE:

1) PROJECT SPACING MAY VARY 1/2"+/-  
BASED ON PANEL WIDTHS

2) PROJECTS ARE ESTIMATED BASED ON  
MANUFACTURER FULL PANELS WITH PARTIAL  
PANELS ON END TO COMPLETE RUNS.

3) HEIGHTS ARE APPROXIMATE

4) GAP SPACING AT BOTOM OF PANEL WILL  
VARY WITH TERRAIN

**AMERICAN  
VINYL WORKS**

**6 ft. Privacy Woodland Series  
AFC-025**

SIZE	FSCM NO.	DWG NO. AFC-025	REV
SCALE	Revision 10-30-09		SHEET